



PCT/AU2004/001579

Australian Government

Patent Office
Canberra

I, LEANNE MYNOTT, MANAGER EXAMINATION SUPPORT AND SALES hereby certify that annexed is a true copy of the Provisional specification in connection with Application No. 2003906337 for a patent by JAMES YLIAS as filed on 17 November 2003.



WITNESS my hand this
Twenty-ninth day of November 2004

A handwritten signature in black ink, appearing to be "LA".

LEANNE MYNOTT
MANAGER EXAMINATION SUPPORT
AND SALES

BEST AVAILABLE COPY

Our Ref: 12182201

P/00/009
Regulation 3:2

AUSTRALIA

Patents Act 1990

PROVISIONAL SPECIFICATION

Applicant(s):

James Ylias
Lot 17 Yippon Creek
Wauchope New South Wales 2446
Australia

Address for Service:

DAVIES COLLISON CAVE
Patent & Trade Mark Attorneys
Level 10, 10 Barrack Street
Sydney, New South Wales, Australia, 2000

Invention Title:

Hinged gutter bracket

The invention is described in the following statement:

- 1 -

GUTTERING SYSTEM

Background of the Invention

The present invention relates to a guttering system, and in particular, to an
5 apparatus for securing a gutter to a fascia such that it can move in a pivoting manner, and
to a method of cleaning a gutter enabled by pivotal movement of the components thereof.

Description of the Prior Art

In certain areas, the build-up of leaves on the rooves and in the gutters of houses
10 and other buildings is a common problem.

Various attempts to minimise the collection of leaves in such guttering systems
have been made. For example, various screens and mesh materials have been used to
extend outwardly of the roof surface to cover the gutter, such that leaves do not fall into
15 the gutter, but rather, are directed across the gutter to fall from the roof. These devices
function such that water collected on the roof surfaces is still able to enter the guttering
system and be carried away appropriately by downpipes to the stormwater system. Whilst
these devices are effective to a certain extent, leaves larger than the mesh size will not fall
through the mesh or grate material and will be moved away as required, small leaves, dirt,
20 etc., still falls into the guttering system whether or not the mesh material is in situ.

In addition to such mesh materials not functioning to prevent leaves and dirt from
entering the filtering the stormwater system particularly well, another major problem
caused as a result of the build-up of leaves and other material in guttering system is that the
25 houses or other buildings can become an extreme bushfire risk.

This therefore identifies a need to provide a system and method for being able to
more effectively clean out the guttering systems of houses and other buildings, to avoid the
build-up of leaves and other debris therein.

30

- 2 -

Summary of the Invention

The present invention seeks to provide a solution to the aforementioned problem, or at least an alternative to the presently known methods and systems.

5 In one broad form, the present invention provides an apparatus for pivotally securing a gutter to a fascia such that it may be pivotally moved between a first (draining) position and a second (cleaning) position.

10 Preferably, the apparatus includes a bracket having an arm outwardly extending therefrom, and, a hinge means provided at a remote end of said arm, said gutter adapted to be secured to said hinge means such that pivotal movement is effected thereabouts.

15 In one preferred form, said gutter includes an integrally formed connection means for pivotal attachment of said gutter to said hinge means on said arm.

20 In an alternative, but also preferred form, the apparatus includes a connection means which is adapted to be secured to said gutter and to said hinge means.

25 Preferably, said connection means is shaped to substantially surround and thereby support said gutter therein.

30 Also preferably, the extremities of said connection means are formed with deformable tabs thereon, which are adapted to be deformed to at least partially surround lips formed on the edges of said gutter's walls.

35 Preferably, the apparatus further includes a releasable locking means to lock said gutter in said first (draining) position.

40 Also preferably, said apparatus is shaped to complement the profile of the gutter to which it is attached.

- 3 -

Preferably, said arm extends outwards from said connection means in a substantially L-shaped configuration.

5 In a further broad form, the present invention provides a guttering system which enable pivoted movement of a gutter component between a first (draining) position and a second (cleaning) position.

10 Preferably, said gutter component pivots upwardly and outwardly from a pivotal axis which is displaced outwards from a fascia to which said guttering system is affixed.

Also preferably, a gutter component is adapted to pivotally move relative to compatible ancillary components including, but not limited to, corner gutter components, downpipe components, etc.

15 Preferably, a seal is provided between said respective gutter components and/or said compatible ancillary components.

In a further broad form, the present invention provides a method of cleaning a gutter, including the steps of:

20 unlocking a locking means which prevents pivotal rotation of a gutter from a draining position;

pivoting said gutter to a cleaning position, such that the gutter is disposed outwardly relative to its draining position;

removing leaves from said gutter;

25 returning said gutter to said draining position; and,

locking said locking means.

- 4 -

Brief Description of the Drawings

The present invention will become more fully understood from the following detailed description of preferred but non-limiting embodiments thereof, described in connection with the accompanying drawing(s), wherein:

5 Fig. 1 illustrates an exploded isometric view of a preferred embodiment of the components of a guttering system in accordance with the present invention;

 Fig. 2 illustrates, in Figs. 2(a) and 2(b) thereof, two elevational views of preferred arrangements of guttering system embodiments, which operate in a similar manner;

 Fig. 3 illustrates, in Figs. 3(a), 3(b) and 3(c), plan views of how the gutter system of
10 the present invention may alternatively be installed about a corner of a building;

 Fig. 4 illustrates an elevational view of how the guttering system of the present invention may be connected into a downpipe; and,

 Fig. 5 illustrates an elevational view of an alternatively preferred embodiment of the present invention.

15

Detailed Description of Preferred Embodiments

Throughout the drawings, like numerals will be used to identify similar features, except where expressly otherwise indicated.

20 As shown in Fig. 1, the guttering system of the present invention, and generally designated by the numeral 1, may comprise a pair of brackets. The embodiment illustrates a fascia bracket 2, and a gutter bracket 3, which are interconnected via hinge pin 4. The fascia bracket may be provided with a plurality of connection means 5, shown as a plurality of orifices 5 in the upwardly extending portion of the fascia bracket 2, and be
25 connected to the fascia via nails, screws or any or like connection means.

 A gutter bracket 3 is shaped such that it can receive a gutter within its side walls 6 and 7, such that the tabs 8 and 9 extending therefrom, respectively, may be bent to straddle the lip of the gutter (not shown).

30

- 5 -

Once the gutter bracket 3 is installed to the fascia bracket 2 by alignment of the hinge components 10 and 11, and then affixed by the insertion of the hinge pin 4, which may be held into place by split pin 12, it will be appreciated that the gutter bracket 3 may be pivotally rotated in the direction shown by arrows 13 in Fig. 2. That is, the gutter may be pivoted upwardly and outwardly between a first, or draining, position as shown in Fig. 2, and a second, or cleaning, position wherein the gutter is typically disposed between 90° and 180°, from the first or drainage position. Once in the second or cleaning position, the gutter may be easily hosed out, or brushed out with a broom or like cleaning implement, such that any and all leaves and other debris contained within the gutter 14 may be easily removed.

Fig. 1 also illustrates the provision of a swivel lock 15, which may be attached to the gutter bracket 3 and adapted to protrude through an elongate orifice 16, such that, when in the drainage position, the swivel lock may be rotated such that the gutter bracket 3 is prevented from moving apart from the fascia bracket 2.

It will be appreciated that the method of cleaning the gutter includes a few simple steps. Firstly, the swivel lock may be rotated, permitting the gutter to be outwardly pivotally moved in the direction shown by arrows 13 in Fig. 2 from the first or draining position to the second or cleaning position. The leaves may fall or be easily removed therefrom. Once cleaned, the gutter may be returned to the draining position, and the swivel lock 15 may be relocked.

It will be understood by persons skilled in the art that, when a single piece of guttering is required to be positioned along one edge of a roof, a relatively simple embodiment shown in Fig. 2 may be formed. However, most houses tend to have either outwards or inwards corners. Fig. 3 shows how the present invention may be easily adapted to cater for outward corners. It will be appreciated by persons skilled in the art that inward corners may be likewise catered for. In Fig. 3, Fig. 3(a) shows how the ends of the gutter may be angled such that they slightly overlap and abut with an adjacent angled edge, such that the outward rotation 13 is still enabled. Fig. 3(b) illustrates an alternative

- 6 -

whereby a fixed corner piece is provided into which straight edged gutters may rest and slightly overlap and may still be easily rotated as necessary between draining and cleaning positions. Fig. 3 illustrates yet an alternative, whereby the corners are extended partially along the edges of the roof line. In some situations, this arrangement may be preferable to that of Fig. 3(b). Downpipes and the like can easily be provided in the fixed corner pieces shown in Figs. 3(b) or 3(c), or, downpipes could be utilised as shown in Fig. 4, whereby the gutter may be molded such that a downpipe extension 17 fits within a downpipe 18, the downpipe extension still being able to be pivotally moved in the direction of arrow 13.

10 It will be appreciated that in most situations, an entirely waterproof seal need not be provided so, for example, the downpipe extension 17 can simply rest intermediate the walls of a downpipe 18. In some situations, it may be more desirable to have a more watertight seal, and it will be understood by persons skilled in the art that this can easily be achieved by the provision of an o-ring type seal or a silicon or rubber type seal between the components. Like seals may also be provided between the various guttering components and cornering components shown in Fig. 3.

20 It will be appreciated by persons skilled in the art that the present invention therefore provides a guttering system which may be easily cleaned, such that bushfire hazard build-up of leaves is easily avoided. It will be appreciated that the guttering components of the present invention may be easily combined to form a guttering system, and that numerous variations and modifications are envisaged to the guttering system.

25 For example, whilst a specific arrangement of components is illustrated in Fig. 1 to illustrate a bracket, various other means for connection of brackets to the gutters, brackets to the fascias, may be embodied. For instance, the gutter bracket could be eliminated as a separate component and formed integrally with the gutter. Likewise, different arrangements of fascia brackets could be provided, whereby the bracket could outwardly extend from beneath the eaves as opposed to the fascia, or, where the brackets may be adjustable, such that the gutter apparatus may be lowered for easy access, for instance, when installed on a steep or high roof. The important aspect of the present invention is

- 7 -


that the guttering system may be pivotally moved between a first draining position and a second cleaning position, such that the gutter may be easily cleaned by the leaves either falling or being easily removed from the gutter.


- 5 An example of an alternatively preferred embodiment is shown in Fig. 5, wherein, a tubular gutter may be supported in a circular-shaped bracket, such that the gutter may be rotated, e.g. by 180°, to spill any leaves and be hosed out for cleaning.

- 10 All these and other variations and modifications which become apparent to persons skilled in the art from a reading of the specification herewith should be considered to fall within the spirit and scope of the present invention as broadly hereinbefore described.


DATED this 17th day of November, 2003

- 15 JAMES YLIAS
By His Patent Attorneys
DAVIES COLLISON CAVE

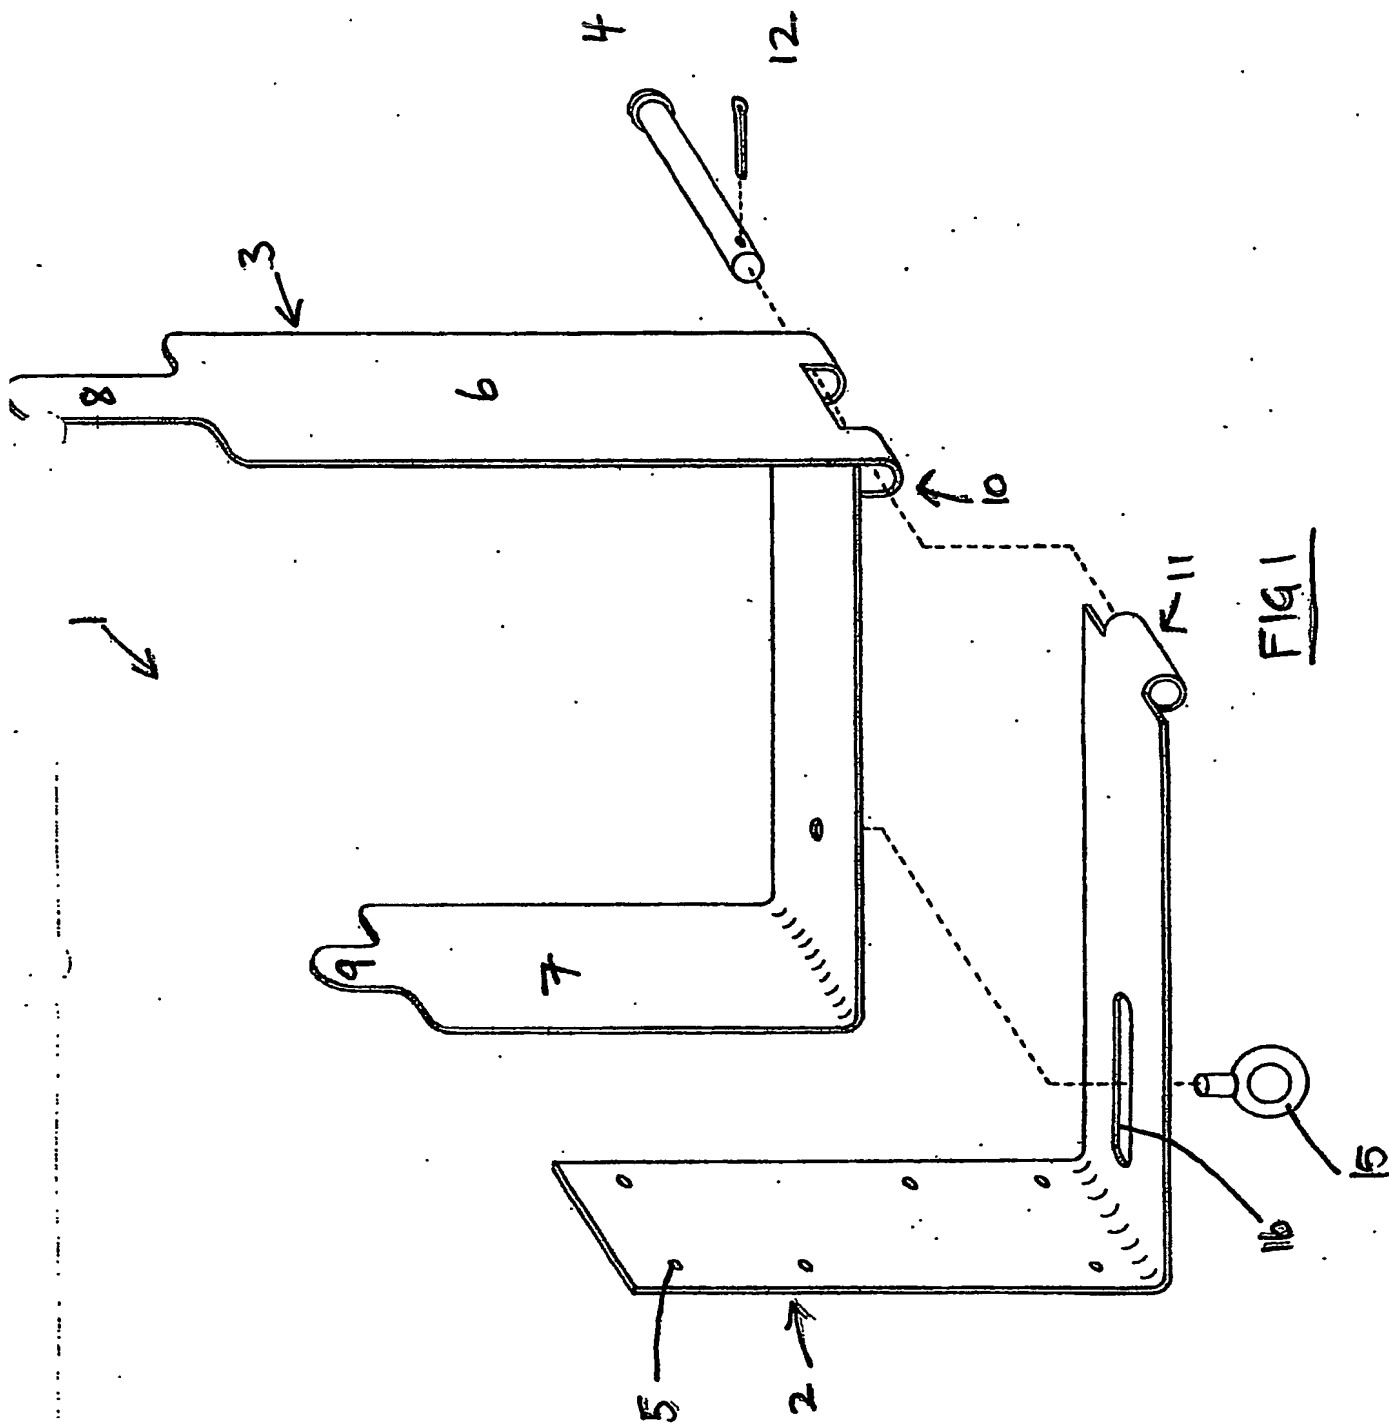

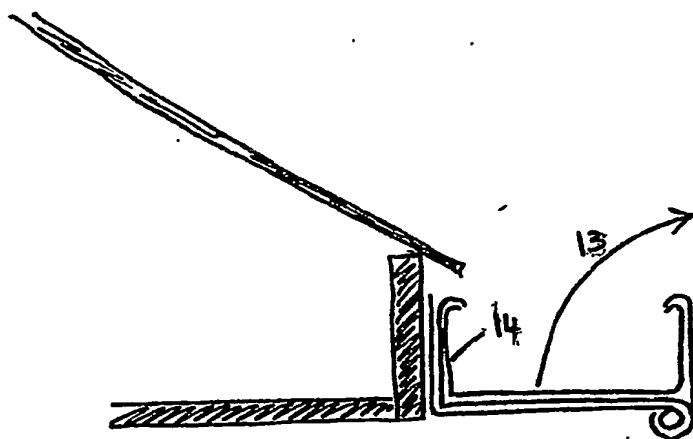


2(a)

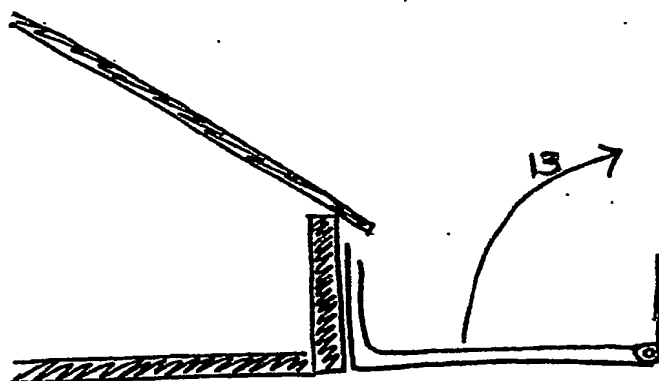


2(b)


FIG 2



3(a)



3(b)



3(c)

Fig 3

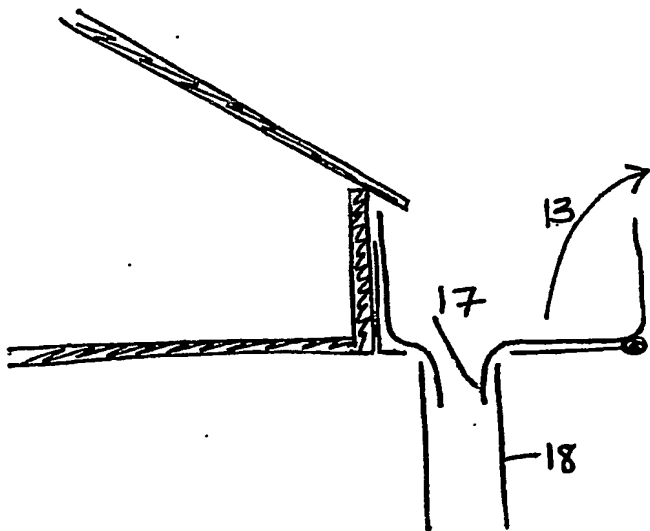


FIG 4

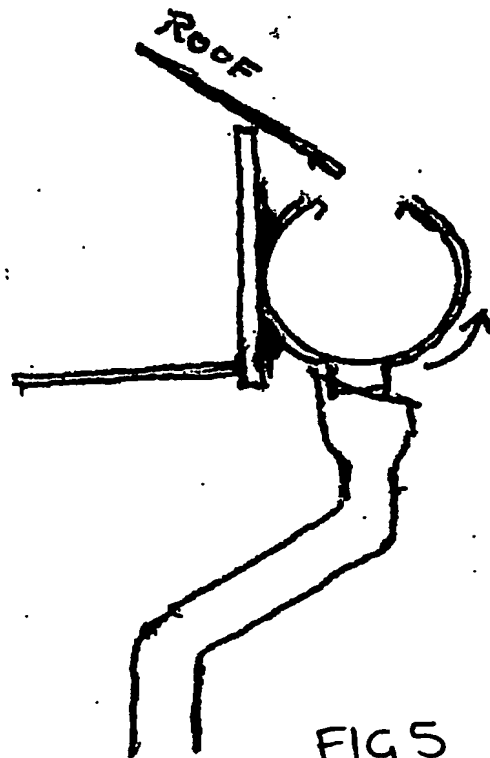


FIG 5

Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/AU04/001579

International filing date: 17 November 2004 (17.11.2004)

Document type: Certified copy of priority document

Document details: Country/Office: AU
Number: 2003906337
Filing date: 17 November 2003 (17.11.2003)

Date of receipt at the International Bureau: 08 December 2004 (08.12.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.